


## swissporBIKUPLAN PF/GF 3500

Located in the heart of the swiss Alps, our research and development team created swissporBIKUPLAN PF/GF 3500 to be applied as **underlay** in a multilayer built-up. Its reinforcement, a high quality polyester stabilized with longitudinal glass yarns, grants an **outstanding dimensional stability** of the membrane.

The lower face is finished with a high quality polypropylene film that is easily torchable **allowing a very fast application of this membrane**. It shall be applied loosely laid or **fully torched**.

Our choices of materials and our processes make our products **setting the standards of quality and sustainability in the waterproofing industry**.

The membrane got the certification of TOR Godkendt ApS of Denmark.

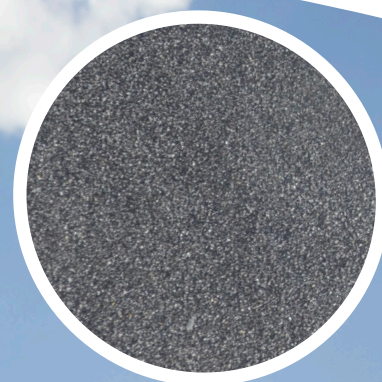

Upper Surface: Talc



Lower Surface: Thermofusible film

# swissporBIKUPLAN PF/GF 3500

Description	SBS modified bituminous membrane
Surface	Upper Talc
	Lower Thermofusible film
Reinforcement	Stabilized polyester
Application Method	Torched
Rolls / pallet (m <sup>2</sup> / Pallet)	24 (168)
Application norm	EN 13707; EN 13969; EN 13970



## Technical Data

Characteristic	Test method	Unit	Value
Length	EN 1848-1	[m]	7.00
Width	EN 1848-1	[m]	1.00
Nominal weight of the product	EN 1849-1	[kg/m <sup>2</sup> ]	3.50 <sup>1)</sup>
Thickness	EN 1849-1	[mm]	3.00 <sup>1)</sup>
Visible defects	EN 1850-1		None
Straightness	EN 1848-1	[mm/10m]	≤ 20
Flexibility at low temperature	EN 1109	[°C]	≤ -20
Flow resistance at elevated temperature	EN 1110	[°C]	≥ 100
Maximum tensile force	EN 12311-1	[N/50 mm]	long.: 750 <sup>2)</sup> transv.: 600 <sup>2)</sup>
Elongation	EN 12311-1	%	long.: 35 <sup>2)</sup> transv.: 35 <sup>2)</sup>
Dimensional stability	EN 1107-1	%	≤ 0.5
Artificial aging behavior at low temperature flexing	EN 1296	[°C]	≤ -15 <sup>3)</sup>
Artificial aging creep resistance at elevated temperature	EN 1296	[°C]	≥ 100 <sup>6)</sup>
Reaction to fire	EN 13501-1	-	E
External fire performance	ENV 1187	-	B <sub>root</sub> (t2) <sup>3)</sup>
Watertightness	EN 1928 meth. B	-	Passed at 200 kPa/24h ( Typ T )
Resistance to static loading	EN 12730	[kg]	≥ 15
Resistance to impact	EN 12691	[mm]	1000
Diffusion equivalent air layer thickness s=μ•d	EN 1931	[m]	≥ 100 <sup>4)</sup>
Resistance to root penetration	EN 13948	-	NPD
Adhesion of granules	EN 12039	%	NPD
Shear strength of the joint seam	EN 12317-1	[N/50 mm]	NPD
Resistance to tearing (nail shank)	EN 12310-1	[N]	250

\*NPD= No Performance Determinated

<sup>1)</sup> Tolerance ± 10%

<sup>2)</sup> Tolerance ± 15%

<sup>3)</sup> Tested roof build-up

<sup>4)</sup> Tolerance - 15%

<sup>5)</sup> Tolerance + 10°C

<sup>6)</sup> Tolerance -10°C

**Safety:** Material Safety Data Sheets are available upon request at the under mentioned mail address of the Team Export.

**Storage:** The material has to be stored in a dry covered place, vertically on pallets or on flat surfaces, less than 12 months (6 months in case of self-adhesive membranes). Protect the membrane from extremely low temperatures and condition the material at temperature above +5 °C at least 24 hours before installation. During storage avoid exposure to direct sunlight.

**Application:** For a correct use of the products, refer to the specific technical documents issued by swisspor Romandie SA. The customer stays responsible for ensuring that each product is suitable for its intended use and that the conditions of use are the correct ones. If any law, norm or regulation are in force in the Country of application and differs from what declared by the manufacturer, these must be considered as compulsory by the applicator and it is his own responsibility to follow it.

**Disclaimer:** swisspor Romandie SA pursues a policy of constant product development and information contained in this document that is the subject to change without notice.

**swisspor Romandie SA**  
Ch. du Bugnon 100 – CP 60  
1618 Châtel-Saint-Denis  
Tel. +41 21 948 48 48  
Fax: +41 21 948 48 49  
romandie@swisspor.com  
www.swisspor.ch

**swisspor Romandie SA**  
Export Team  
1618 Châtel-Saint-Denis  
Tel. +41 21 948 48 95  
Fax: +41 21 948 48 19  
export@swisspor.com  
www.swisspor.ch



**swisspor**  
saving energy